


M.2 2242 SSD

IM2P41E4

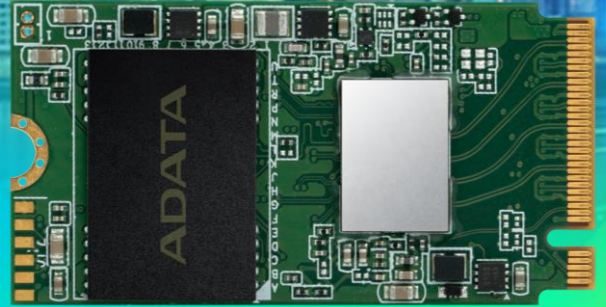

The ADATA IM2P41E4 PCIe Gen4x4 M.2 2242 industrial-grade SSD is NVMe 1.4 compliant, features 112-layer 3D TLC NAND flash, provides excellent read and write performance and high capacities as well as a 3K P/E cycle rating for excellent durability. What's more, the IM2P41E4 supports Host Memory Buffer for improved random read and write performance, LDPC ECC (error correction code), RAID Engine, and End-to-End Data Path Protection technology for ideal data integrity. Furthermore, through ADATA's rigorous SSD verification process, the IM2P41E4 is guaranteed to meet the stringent requirements of industrial applications. With high compatibility and durability, the IM2P41E4 is ideal for a wide range of industrial applications such as 5G networking, IPC, automation, transportation, healthcare and surveillance.

Features

- PCIe Gen4x4 for excellent read and write performance
- Supports NVMe 1.4
- 112-layer 3D TLC (BiCS5) NAND Flash for higher capacity, durability and power efficiency
- 3K P/E Cycles – improved endurance and reliability
- Supports Host Memory Buffer
- LDPC ECC, RAID Engine, and End-to-End (E2E) Data Path Protection
- Ideal for 5G networking, IPC, automation, transportation, healthcare and surveillance


Ordering Information

Operating Temp.	128GB	256GB	512GB	1TB	2TB
0°C to 70°C	IM2P41E4-128GCTB5	IM2P41E4-256GCTB5	IM2P41E4-512GCTB5	IM2P41E4-001TCTB5	IM2P41E4-002TCTB5

Specifications

Model	IM2P41E4
Form Factor	M.2 2242
Capacity	128GB – 2TB
Interface	PCIe Gen4x4
Flash Type	112L 3D TLC
Dimensions (L x W x H)	42 x 22 x 3.6mm
Sequential Read (Max.)	5000MB/s
Sequential Write (Max.)	4200MB/s
Operating Temperature (Standard)	0°C to 70°C
Operating Temperature (Industrial)	-
Operating Voltage	3.3V
Power Consumption (Max.)	6.3W
Shock Resistance	1500G/0.5ms, Half Sine Wave
Operating Humidity	5%-95% RH, non-condensing
Vibration Resistance	20G (20-2000Hz)
Technologies	LDPC ECC, RAID Engine, Wear Leveling, HMB, SLC Cache, TRIM command, Thermal Throttling, S.M.A.R.T. Monitor, End-to-end Data Path Protection, Host Memory Buffer, ESD Support (IEC/EN 61000-4-2 level 4)

Dimensions

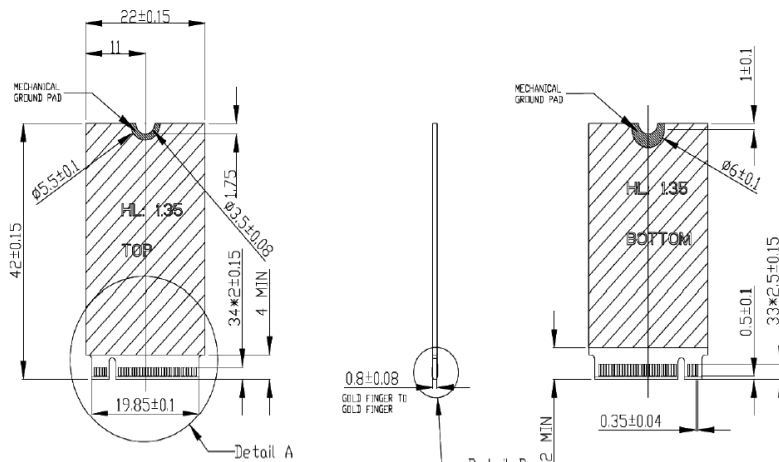

Unit: mm

Contact Us

HQ (Taiwan):
 T: +886-8228-0886
 E: IA_Global@adata.com
US:
 T: +1-714-332-8708
 E: IASales_us@adata.com

EU:
 T: +49-899-0405-296
 E: IASales_eu@adata.com
China
 T: +86-21-6233-1010
 E: IASales_cn@adata.com

JP:
 T: +81-3-5807-0011
 E: IASales_jp@adata.com
APAC/MEA:
 E: IASales_apacmea@adata.com